

Hose Reels. (Category 40)

Recoila Retractable Air & Water Reels

- Up to a 5 year warranty
- Highest quality 'finished edge' Spring steel strip
- Full flow full DR brass swivels and fluid paths
- Positive crimp hose fittings
- All position positive latching system
- Tough, impact, corrosion resistant and UV stabilized Polypropylene with Anti static and flame retardants
- Unique ratchet tensioning system
- Heavy Duty wall mounting swivel system
- Replaceable protective mouth guard
- Large side covers for easy access in servicing and maintenance routines
- Food grade approved materials
- Unique service locking pin port for added safety
- Two part fully adjustable bumper
- Detailed operation and service manual
- Easy mount drill hole pattern supplied



Code	Type	Hose I.D.	Hose Length	Max Pressure	Inlet	Outlet	Temp Range
40-RAW0815	Air & Water - TPR Hose	8mm	15m	240 psi	3/8 BSPF	3/8 BSPM	-5/+65°C
40-RAW0820	Air & Water - TPR Hose	8mm	20m	240 psi	3/8 BSPF	3/8 BSPM	-5/+65°C
40-RAW1015	Air & Water - TPR Hose	10mm	15m	240 psi	3/8 BSPF	3/8 BSPM	-5/+65°C
40-RAW1020	Air & Water - TPR Hose	10mm	20m	240 psi	3/8 BSPF	3/8 BSPM	-5/+65°C
40-RAW1215	Air & Water - TPR Hose	12mm	15m	240 psi	1/2 BSPF	1/2 BSPM	-5/+65°C
40-RAW1218	Air & Water - TPR Hose	12mm	18m	240 psi	1/2 BSPF	1/2 BSPM	-5/+65°C
40-RAWHD1210	Air/Water - Rubber Hose	12mm	10m	240 psi	1/2 BSPF	1/2 BSPM	-5/+65°C
40-RBD0820	Air Breathing	8mm	20m	240 psi	3/8 BSPF	3/8 BSPM	-5/+60°C
40-RBD1020	Air Breathing	10mm	20m	240 psi	3/8 BSPF	3/8 BSPM	-5/+60°C
40-RDW1218	Drinking Water	12mm	18m	240 psi	3/8 BSPF	3/8 BSPM	-5/+60°C
40-RG1218	Garden Hose	12mm	18m	240 psi	1/2 BSPF	Hose	-5/+60°C
40-RHPW0615	High Pressure Air / Water	6mm	15m	1500 psi	1/4 NPTF	1/4 BSPM	-30/+90°C
40-RHPW1015	High Pressure Air / Water	10mm	15m	1500 psi	1/4 NPTF	3/8 BSPM	-30/+90°C
40-RHW1015	Hot Wash	10mm	15m	240 psi	3/8 BSPF	3/8 BSPM	-30/+85°C
40-RHW1020	Hot Wash	10mm	20m	240 psi	3/8 BSPF	3/8 BSPM	-30/+85°C
40-RHW1215	Hot Wash	12mm	20m	240 psi	1/2 BSPF	1/2 BSPM	-30/+85°C

Recoila Compact Retractable Air & Water Reels



ReCoila® Gen IV GP series reels are the perfect solution for small to medium workshop applications where size is important or short hose lengths are all that is required. Ideal applications are service vans, under bench, assembly lines, home handyman. These reels are supplied complete with 1.5-m of inlet connection hose.

Maximum Pressure : 240 psi. Temperature range : -5/+65°C

Code	Type	Hose I.D.	Hose Length	Inlet	Outlet
40-RGP0612	Air & Water - TPR Hose	6mm	12m	3/8 BSPF	1/4 BSPM
40-RGP0812	Air & Water - TPR Hose	8mm	12m	3/8 BSPF	3/8 BSPM
40-RGP1010	Air & Water - TPR Hose	10mm	10m	3/8 BSPF	3/8 BSPM

Hose Reels. (Category 40)

Recoila Retractable Gas & Welding Reels



These reels are an ideal compact solution for all gas welding and cutting applications. The unique external swivel design on the oxygen and fuel gas reels provides added safety and ease of O ring and seal replacement. When hoses are stored by wrapping them around the bottles or trolleys there is a greater potential of a fire risk. By installing a ReCoila® gas reel you not only create a safer working environment, but also extend the hose life and gain productivity efficiencies.



Code	Type	Hose I.D.	Hose Length	Max Pressure	Inlet	Outlet	Temp Range
40-RA0620	Argon	5mm	20m	300 psi	5/8 UNFM	5/8 UNFF	-20/+80°C
40-RFD0620	Food Gas / CO2	6mm	20m	240 psi	3/8 BSPF	1/4 BSPM	-30/+65°C
40-RFD0820	Food Gas / CO2	8mm	20m	240 psi	3/8 BSPF	3/8 BSPM	-30/+65°C
40-RFD1020	Food Gas / CO2	10mm	20m	240 psi	3/8 BSPF	3/8 BSPM	-30/+65°C
40-RN1015	Nitrogen	10mm	15m	600 psi	3/8 BSPF	3/8 BSPM	-30/+90°C
40-ROA0608	Oxy Acetylene Twin	5mm	8m	300 psi	5/8 UNFM	5/8 UNFF	-20/+80°C
40-ROA0615	Oxy Acetylene Twin	5mm	15m	300 psi	5/8 UNFM	5/8 UNFF	-20/+80°C
40-ROP0608	Oxy Propane Twin	5mm	8m	300 psi	5/8 UNFM	5/8 UNFF	-20/+80°C
40-ROP0615	Oxy Propane Twin	5mm	15m	300 psi	5/8 UNFM	5/8 UNFF	-20/+80°C
40-RP0620	Propane	5mm	20m	300 psi	5/8 UNFM	5/8 UNFF	-20/+80°C
40-RP1015	Propane	10mm	15m	300 psi	5/8 UNFM	5/8 UNFF	-20/+80°C

Recoila Retractable Pesticide / Chemical Reels



ReCoila® Gen III WP series offers a lightweight corrosion proof solution for the dispensing of herbicides and pesticides. Ideally suited to spot spraying from quad bikes and small vehicles.

Maximum Pressure : 240 psi. Temperature range : -5/+60°C

Code	Type	Hose I.D.	Hose Length	Inlet	Outlet
40-RWP1015	Pesticide / Chemical	10mm	15m	3/8 BSPF	3/8 BSPM
40-RWP1020	Pesticide / Chemical	10mm	20m	3/8 BSPF	3/8 BSPM
40-RWP1215	Pesticide / Chemical	12mm	15m	3/8 BSPF	3/8 BSPM
40-RWP1218	Pesticide / Chemical	12mm	18m	1/2 BSPF	1/2 BSPM

Recoila Retractable Lubrication Hose Reels



ReCoila® Gen III OL and GR series reels are the ideal solution for light duty oil and grease transfer applications.

Temperature Range : -30/+90°C

Code	Type	Hose I.D.	Hose Length	Max Pressure	Inlet	Outlet
40-RGR0615	Grease	6mm	15m	5000 psi	1/4 NPTF	1/4 BSPM
40-ROL1015	Oil	10mm	15m	1200 psi	3/8 BSPF	3/8 BSPM
40-ROL1210	Oil	12mm	10m	1200 psi	1/2 BSPF	1/2 BSPM

Electrical & Safety Barrier Reels. (Category 40)

Recoila Retractable Electric Cord & Forklift Recharge Reels

ReCoila® Gen III EL & ELDC series reels offers an ideal solution for managing and storing electrical cord and fork-lift recharging cables. Over heating cables and poor recharges are generally a result of damaged cables and connections from being left laying around. Installing a recharge reel will not only increase the life expectancy of the cables and connectors but will make the operation of recharging more efficient and offer a safer tidier work area.

*N/S = Not Supplied



Code	Type	Amps	Cable	Cable Length	Cores	Inlet	Outlet
40-REL2402010	Electric Cord 240 VAC	10	1 mm ²	20m	3	Plug	Socket
40-REL2402015	Electric Cord 240 VAC	15	2.4 mm ²	20m	3	Plug	Socket
40-REL4152010	Electric Cord 3 Phase 415 VAC	10	2.4 mm ²	20m	4	*N/S	*N/S
40-REL4152015	Electric Cord 3 Phase 415 VAC	15	2.4 mm ²	20m	4	*N/S	*N/S
40-REL4152020	Electric Cord 3 Phase 415 VAC	30	2.4 mm ²	20m	4	*N/S	*N/S
40-REL4152032	Electric Cord 3 Phase 415 VAC	32	4 mm ²	20m	4	*N/S	*N/S
40-RELDC6050	Forklift Recharge 600 VDC	50	16 mm ²	5m	2	Plug	Socket
40-RELDC6175	Forklift Recharge 600 VDC	175	16 mm ²	5m	2	Plug	Socket
40-RELDC6350	Forklift Recharge 600 VDC	350	16 mm ²	5m	2	Plug	Socket

Recoila Compact Retractable Electric Cord & Light Reels

ReCoila® Gen IV E & L series reels are the perfect solution to ensuring cables and cords are stored safely when not in use. When cables and cords are left laying around they are easily damaged resulting in a potential electrocution. The L Series reel comes complete with a light which is ideally suited for mechanical workshops and panel shops.



Code	Type	Amps	Length	Cores	Inlet	Outlet
40-REL2401210	Electric 240 VAC	10	10m	3	Plug	Socket
40-REL2401215	Electric 240 VAC	15	15m	3	Plug	Socket
40-RL24032610	Electric 240 VAC	10	10m	2	Plug	Light

The L Series reel has an inline transformer at the plug offering 32 VAC to the fluorescent light.

Recoila Retractable Safety Barrier Reels

Fitted with 15m of 50mm wide woven webbing (safety orange) or 15m of polyurethane chain (safety yellow) the ReCoila® Barrier Reels are the ideal way to quickly & efficiently set up personnel safety barriers for areas that require regular guarding. Additionally these reels are widely used to cordon off roller doors that are required to be open for light and air movement and frequent traffic however need to be restricted access.



Code	Type	Length	End Fitting
40-RBAR5015	50mm Woven Webbing	20m	Sewn Loop
40-RBARC15	6x36mm Polyurethane Chain	15m	Link

Hose Reels. (Category 40)

Air Hose Balancer

Hose : 5mm I.D. Polyurethane
 Length : 2 Metres
 Outlet : 1/4 Male BSP
 Working Pressure : 100psi

Code : 40-HR0502



Spring Rewind Air Reel


Hose : 6.5mm I.D. Polyurethane
 Length : 6 Metres
 Outlet : 1/4 Male BSP
 Working Pressure : 100psi

Code : 40-HR0606



Hand Wind Air Reels


- Full Metal Construction
- Powder Coated Finish
- 360° Swivel Base
- 220 psi Working Pressure

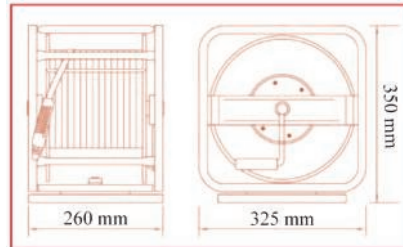

Code	Hose	Length	Inlet	Outlet
40-HR0840	8mm I.D. Braided Polyurethane	40m	1/4 BSP	1/4 BSP
40-HR1030	10mm I.D. Braided Polyurethane	30m	3/8 BSP	3/8 BSP

Heavy Duty Manual Hose Reelers

- Can be Fitted with Hose on Request
- Heavy Duty Hose Reel
- Fully Galvanised
- Greased Axle and Lubrication Points
- Also available with disc ends instead of spokes.
- Reels can be modified to suit Customer Needs
- Other sizes available on request.
- All dimensions in millimetres.

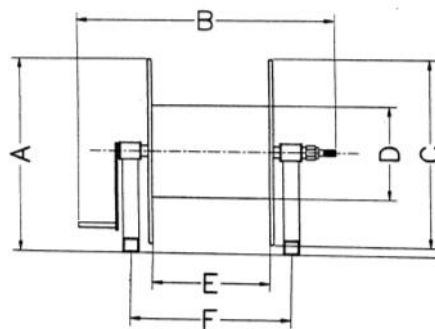

Code	Hose I.D.	Capacity	A	B	C	D	E	F
40-M06100	6mm (1/4)	100 m	460	500	425	170	200	310
40-M05100	8mm (5/16)	100 m	460	500	425	170	200	310
40-M06050	10mm (3/8)	50 m	460	500	425	170	200	310
40-M06100	10mm (3/8)	100 m	540	510	515	250	210	320
40-M08050	12mm (1/2)	50 m	460	500	425	170	200	350
40-M08100	12mm (1/2)	100 m	460	640	425	170	380	450
40-M10100	16mm (5/8)	100 m	580	600	550	250	300	410
40-M12040	20mm (3/4)	40 m	540	510	515	250	210	320
40-M12060	20mm (3/4)	60 m	540	600	515	250	300	410
40-M12100	20mm (3/4)	100 m	630	600	600	250	300	410
40-M16026	25mm (1")	26 m	540	510	515	250	210	320
40-M16040	25mm (1")	40 m	540	630	515	250	300	410
40-M16060	25mm (1")	60 m	630	520	600	250	300	410